

PNEUMATIC ROLLER

## SR26T-3

Ready for heavy-duty roadwork

- ▶ Engine model: Shangchai D6114ZG10B
- ▶ Rated power: 115 kW/2000 rpm
- ▶ Max. operating weight: 26.0 t

### Product features

With electrohydraulic transmission control, torque converter, smooth, non-impact drive system for decreased shearing, double ground friction breaking torque, the Shantui SR26T-3 is ready to hit the road and get the job done. Dual safety systems plus left and right directional foot accelerators, foot brake and electronic gauges help keep the SR26T-3 productive. Powered by an in-line, water-cooled, four-cylinder turbo-charged direct-injection Shangchai D6114ZG10B engine.



# SHANTUI

VALUE THAT WORKS

Shantui Construction Machinery Co., Ltd.

ADDRESS:

No. 58, G327 Highway  
Jining City, Shandong, CHINA

TEL: +86-537-2909369

FAX: +86-537-2311219

EMAIL: [trade@shantui.com](mailto:trade@shantui.com)

PNEUMATIC ROLLER

# SR26T-3

Technical specifications:

Overall length: 5010 mm




Minimum turning radius: 8000 mm

Overall width: 2470 mm



Fuel capacity: 195 L

Overall height: 3350 mm

SR26T-3

WEIGHT AND DIMENSIONS			
	Weights	Minimum operating weight	12900 kg
		Metal ballast	11500 kg
		Water ballast	1600 kg
		Maximum working weight	26000 kg
	Compaction characteristic	Working width	2365 mm
		Tire distance	510 mm
		Ground pressure	270~480 kPa
		Wheelbase	3840 mm
		Front/rear tire overlap	70 mm
		Front tire oscillation	±50 mm
Tires	Number of tires, front/rear	Front: 4/rear: 5	
	Tire size	13/80-20	
ENGINE AND DRIVE TRAIN			
	Engine	Make & model	Shangchai D6114ZG10B
		Type	Turbocharged
		Fuel	Diesel
		Cooling	Water
		Number of cylinders	6
		Rated power	115 kW
		Rated speed	2000 rpm
	Drive train	Minimum ground clearance	290 mm
Maximum climbing ability		20 %	
Forward speed		I	0~8 km/h
		II	0~16 km/h
Reverse speed	I	0~8 km/h	
CABIN & CONTROLS			
	Electrical system	DC, negative ground	24 V
		Alternator	28 V, 55 A
	Brakes	Service brake	Caliper dry disc
		Parking brake	Spring-loaded/mechanical
	Steering	Steering system	Hydraulic
		Steering method	Articulation
Steering angle		±33°	
Steering radius		8.5 m	

OVERALL DIMENSIONS

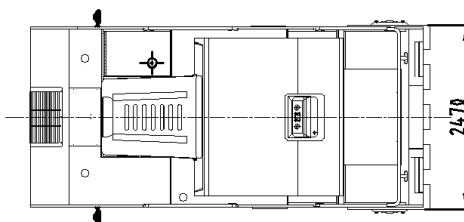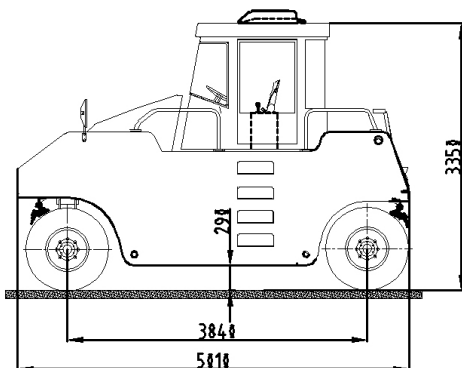

▶ THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.